


## F311 Custom Static Torque Transducer

2 to 2000Nm

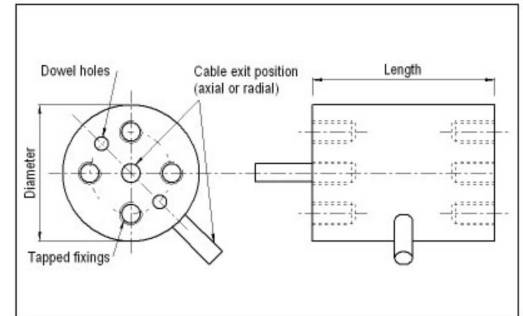

Style A

### Specification

Parameter	Value	Unit
Zero load output	$\pm 4$	% RT
Temperature effect on rated output per $^{\circ}\text{C}$	$\pm 0.005$	% AT
Temperature effect on zero load output per $^{\circ}\text{C}$	$\pm 0.01$	% RT
Temperature range - Compensated	-10 to +50	$^{\circ}\text{C}$
Temperature range - Safe	-10 to +80	$^{\circ}\text{C}$
Sealing	IP65	
Cable length	2	m

**We can manufacture static torque transducers with ranges between 2Nm and 2000Nm to your specific requirements.**

For lower ranges please see the F315. If you contact us using the "Make an enquiry" button and send it to our sales department we will respond with a quotation, usually within 24 hours. We need at least one contact number or email address to return the quotation!

## Notes

- AL = Applied load.
- RL = Rated load.
- Temperature coefficients apply over the compensated range.

### **Novatech Measurements Limited**

83 Castleham Road, St Leonards on Sea, East Sussex, TN38 9NT, England.

**Telephone:** +44 (0)1424 852744

**Fax:** +44 (0)1424 853002

**E-mail:** [info@novatechloadcells.co.uk](mailto:info@novatechloadcells.co.uk)