


F336 Custom Torque Disc Loadcell

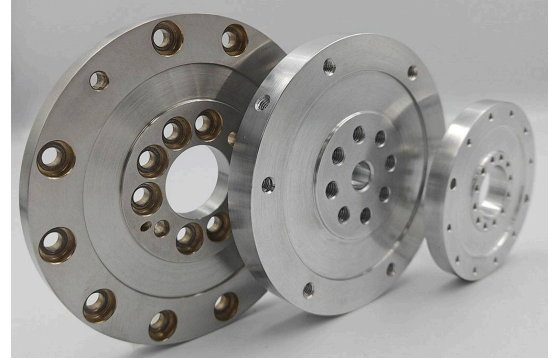

- ✓ Low profile design
- ✓ High resistance to axial and lateral loading
- ✓ Ideal for robotics applications
- ✓ Suitable for use with harmonic drives
- ✓ Bespoke geometry and fixing options
- ✓ Traceable calibration with certificate included
- ✓ Standard 1 year warranty

Specification

Parameter	Value	Unit
Load range	To be advised by customer	Nm
Non-linearity - Terminal	±0.5	%RL
Hysteresis	±0.5	%RL
Creep	±0.1	%AL
Repeatability	±0.1	%RL
Output Symmetry	±0.5	%AO
Zero load output	±4	%RL
Temperature effect on rate output per °C	±0.005	%AL
Temperature effect on zero load output per °C	±0.005	%RL
Temperature range - Compensated	-10 to +50	°C
Temperature range - Safe	-10 to +80	°C
Excitation voltage - Recommended	10	V
Bridge Resistance	700	Ω
Insulation resistance - Minimum at 50Vdc	500	MΩ
Overload - Safe	50	%RL

Overload - Ultimate	100	%RL
Sealing	IP65	
Cable length	2	m

F336 Customer Torque Disc loadcell. Geometry: Low profile torque transducer for use in applications with limited space. Ideal for robotics, animatronics and for use with harmonic drives.

This static torque transducer is designed primarily for requirements with limited space availability or for mass critical systems, making it ideal for applications in the robotics, automotive, aerospace, and medical sectors. However, its excellent overall performance and reliability makes it suitable for a much wider range of OEM and end-user applications. Its robust design ensures accurate data for systems even when subject to significant extraneous forces, such as axial and lateral loads, or moments. When mounted within a rotating joint of a robot arm, for example, the F336 design is effective at resisting the off-axis forces and moments arising from the arm's self-weight, and additional payload, throughout the full range of movement. We can offer extensive customisation options to meet your specific needs. Detailed information about load cases and the geometries of surrounding assemblies will be required to accurately determine the resulting extraneous loads. Please consult our engineering department to design a variant tailored to your application, considering factors such as torque range, outer diameter, bore size and overall height, as well as size, position and number of fixings. Variants for operation up to 250°C or use in vacuum environments may be available on request.

Notes

- AL = Applied load
- RL = Rated load
- Temperature coefficients apply over the compensated range
- Exact performance may vary depending on level of customisation

Connections


The torque transducer is fitted with 2 meters of PVC insulated 4 core cable as standard. The cable size may depend on the chosen geometry.

Excitation +ve = Red, Excitation -ve = Blue, Signal +ve = Yellow, Signal -ve = Green, Screen = Orange

Output will be positive in the clockwise direction as standard. Reverse the signal connections to obtain a positive output counter-clockwise if required.

Files

Type	Title	Download
	Outline drawing of the product.	

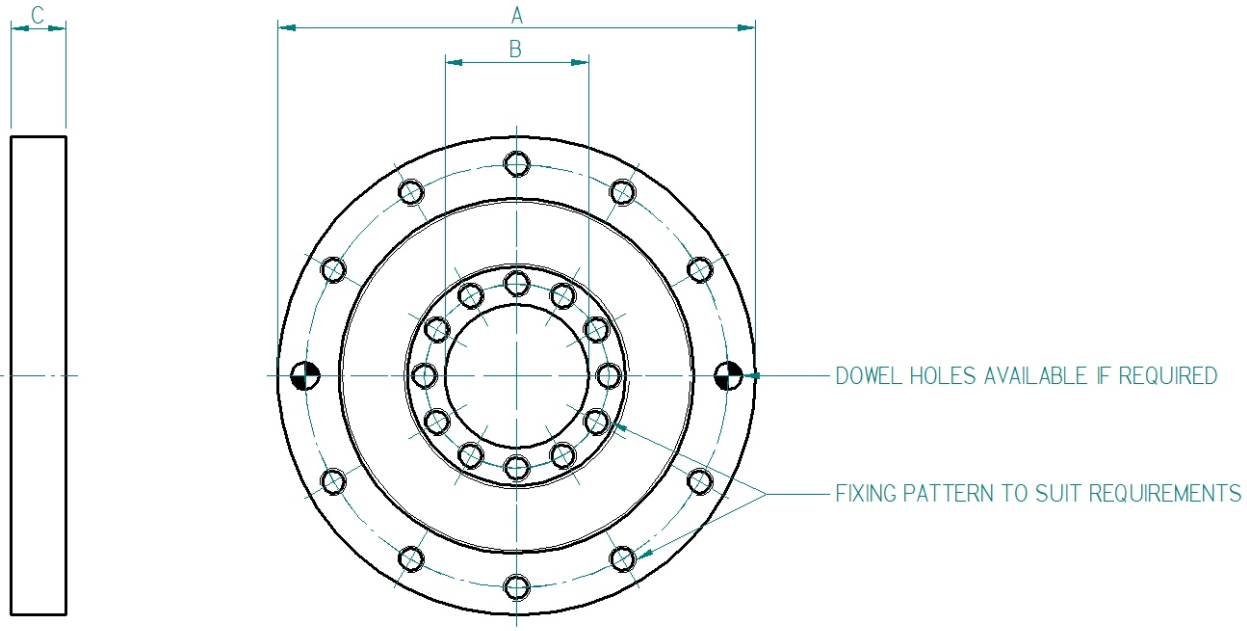

The technical drawing consists of two views of a torque transducer. On the left is a side view showing a vertical rectangular profile with a dimension line labeled 'C' indicating its height. On the right is a top-down view of the circular transducer. It features three concentric circles. The outermost circle has a diameter dimensioned as 'A'. Inside it, a second circle has a diameter dimensioned as 'B'. The innermost circle is the central bore. There are two rows of small circles representing holes: one row is located between the inner and middle circles, and another row is between the middle and outer circles. Two larger circles are positioned on the outer edge, one on the left and one on the right. Two callout lines point to these larger circles with the text 'DOWEL HOLES AVAILABLE IF REQUIRED'. Another callout line points to the outermost circle with the text 'FIXING PATTERN TO SUIT REQUIREMENTS'.

Novatech Measurements Limited

83 Castleham Road, St Leonards on Sea, East Sussex, TN38 9NT, England.

Telephone: +44 (0)1424 852744

Fax: +44 (0)1424 853002

E-mail: info@novatechloadcells.co.uk