


## SY014 Integral Loadcell Amplifier

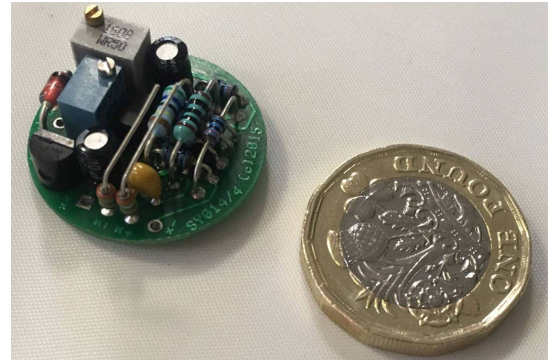

### Specification

Parameter	Value	Unit
Output	4 to 20	mA
Non-linearity - typical	$\pm 0.05\%$ of full range	
Supply requirements	code Q 24Vdc (2 wire)	
	code Z 12Vdc (3 wire)	
	code Y 24Vdc (3 wire)	
Operating Temperature	0 to +50	°C

**This loadcell amplifier is designed for mounting inside the F256 and F257 loadcells.**

It is available in three versions, 2 wire 24V powered, 3 wire 12V powered and 3 wire 24V powered. The 2 wire version is only suitable for use with 2000ohm bridges. On loadcells with bi-directional calibration the zero is set at 12mA.

## Files

Type	Title	Download
PDF Instructions	Printable user instructions for the two wire SY014	<a href="#">Download</a>
PDF Instructions	Printable user instructions for the three wire SY014	<a href="#">Download</a>

### **Novatech Measurements Limited**

83 Castleham Road, St Leonards on Sea, East Sussex, TN38 9NT, England.

**Telephone:** +44 (0)1424 852744

**Fax:** +44 (0)1424 853002

**E-mail:** [info@novatechloadcells.co.uk](mailto:info@novatechloadcells.co.uk)